


Type	AI ZOOM		Mount	C	1/2"	
Focal Length	8.0~80mm		Back Focus	16.49mm		
Fno.	F1.6		Mechanical Bf	17.5mm		
Designed Image Format	1/2"(4.8x6.4mm)		Exit Pupil	123.8mm		
Operation Range	Iris	F1.6-T360	Filter Size	M49x0.75mm		
	Focus	1m ~ infinity	Aperture	Front	∅40.0mm	
	Zoom	8.0~80mm		Rear	∅12.8mm	
Control	Iris	DC Galvanometer	Dimention	68x65x103.5mm		
	Focus	DC Motor		Weight	455g	
	Zoom	DC Motor				
Object Size at MOD	Wide	564 x760mm				
	Tele	46 x 60mm				
Field of View	D	54.0°~5.6°	1/3"	41.0°~4.35°		
	H	43.4°~4.6°		32.9°~3.51°		
	V	32.8°~3.5°		24.8°~2.65°		
Control	Iris		Focus	Zoom		
Driving Coil/Supply Volt.	182Ω		DC 6-12V	DC 6-12V		
Damping Coil/Current	1145Ω		60mA or less	60mA or less		
Response Time	-		1 - 2 sec.	1 - 2 sec.		
Potentiometer	-		10KΩ VR	10KΩ VR		
Light Measuring Method	Average to Peak(Factory set at Average)					
Input Signal	Video Signal (V or VS)					
Iris Accuracy	±15% at Video Signal Level					
Sensitivity Adjustment	0.4~1.0Vp-p(Video Signal)					
Operating Temperature	-10 ~ +50 Celsius					

## DIMENSIONS

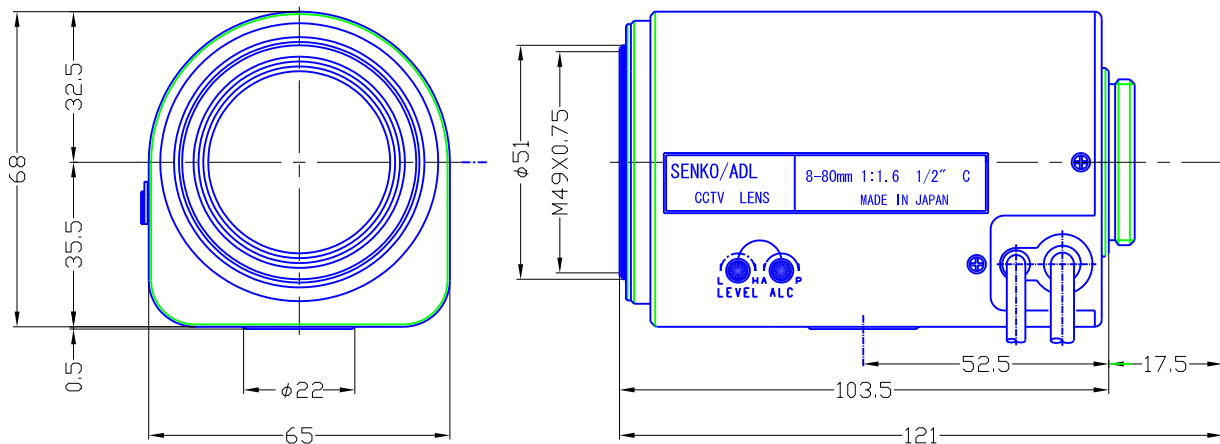

## Wiring Diagram

1) 3-core Cable for Auto Iris

RED	+ 12V
WHITE	Video
BLACK	GND

2) 4-core Cable for Focus / Zoom Control

Black	Focus (+)	Far to Near (-)	Near to Far
Green	Focus (-)	Far to Near (+)	Near to Far
Yellow	Zoom (+)	Wide to Tele (-)	Tele to Wide
Red	Zoom (-)	Wide to Tele (+)	Tele to Wide