

SWIR33 Series SenSWIR InGaAs Camera

VCI-A1GT+SWIR33 Series | GigE | Cooled Industrial Area Scan Camera Using SenSWIR InGaAs



- 1、724FPS high frame rate
- 2、InGaAs SWIR Detector
- 3、640 x 512
- 4、15um pixel size
- 5、900nm-1700nm
- 6、Global shutter
- 7、Built-in TEC refrigeration chip, the temperature difference can reach 45 degrees Celsius below the ambient temperature
- 8、PID precise temperature control, the fluctuation is less than 0.3 degrees
- 9、CameraLink Full / USB3 (under development) / 10GigE (under development)
- 10、12-bit output (14-bit ADC)
- 11、Multiple working modes: video mode/soft trigger mode/external trigger mode
- 12、Support field update firmware
- 13、Accept OEM custom development



Specification

Model	VCI-A1GT033GM-SWIR-B1	VCI-A1GT033GM-SWIR-B3	VCI-A1GT033GM-SWIR-B7
Parameter	330,000 pixels 3/4" InGaAs GigE Camera		
Sensor model	National production		
Sensor type	InGaAs CMOS image sensor		
Spectral range	900nm - 1700nm		
pixel size	15 μm x 15 μm		
Target size	3/4"		
ADC	8-bit output /14-bit output (14-bit ADC)		
Frame Rate & Resolution	125@640x512	350@640x512	360@640x512, 700@320x256
Memory	512MB		
QE	75%@ 1350nm		
Conversion gain	138.6e-/ADU(LG), 5.54e-/ADU(MG), 1.2e-/ADU (HG)		
Dynamic Range	70.59dB(LG), 67.96dB(MG), 47.98dB(HG) *1		
Read noise	586.82e(LG), 35.05e(MG), 68.44e(HG)		
Full well charge	1986426.78e(LG), 87649.83Ke(MG), 17147.351e(HG) *1		
Maximum SNR	62.98dB(LG), 49.43dB(MG), 42.34dB(HG)		
Dark current			
Exposure time range	50us~5s	25us~5s	50us~5s
Shutter mode	Global shutter		
Data interface	GigE		
Digital I/O	1 optocoupler isolated input, 1 optocoupler isolated output		
Data Format	Mono 8 / Mono 14		
Cooling temperature	Below room temperature 40 degrees Celsius		
General parameters			
Power supply	DC12V power supply		
Power consumption			
Temperature	Working temperature -30 ~ 60 °C, storage temperature - 40 ~ 85 °C		
Humidity	20%-80% , non-condensing		
Size	68mm×68mm×90.3mm		
Weight	485g		
Lens mount	C-mount interface		
Software	Provide SDK development kit and CL View software base		

Camera Dimensions

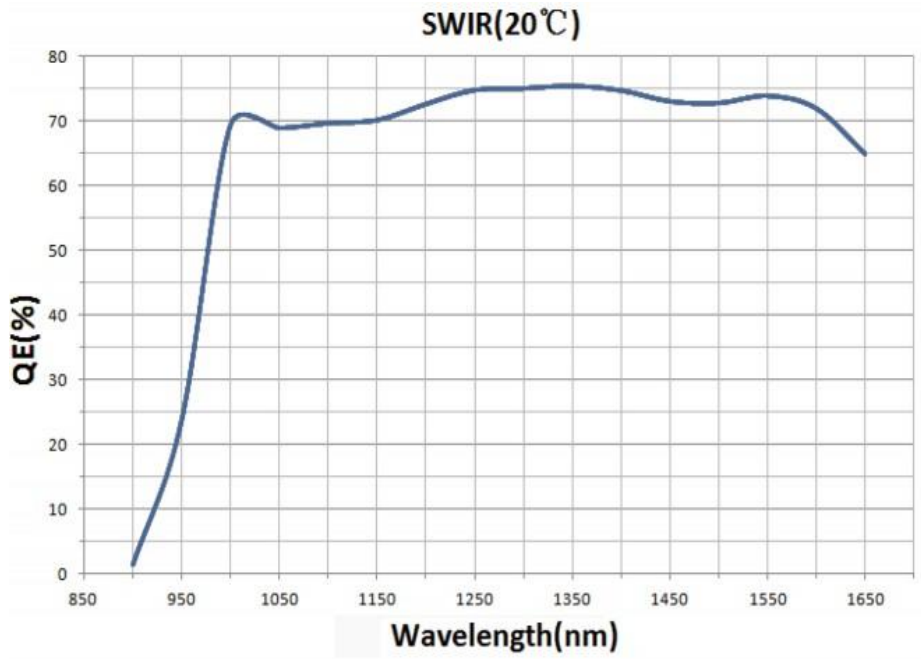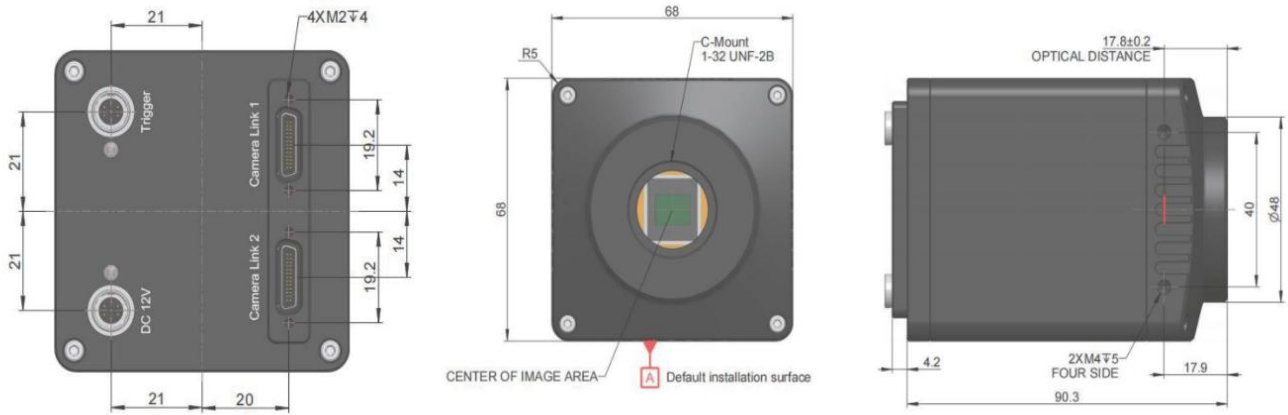

The spectral QE of SWIR33 Short-Wavelength Infrared Cameras